



## Product Data

### A/RH-TEMP Series Relative Humidity/ Temperature Combinations

#### Product Description

The A/RH-TEMP Series Relative Humidity transmitters, convert a resistance to a linear 4 to 20 mA, 0 to 5 VDC, or 0 to 10 VDC output. The current signal may be transmitted over long distances on unshielded twisted-pair wire and will not be affected by the lead wire resistance or electrical noise.

The Advanced Ceramic Technology design overcomes the limitations of other resistance-based humidity sensors that utilize water soluble polymer coatings. The Advanced Ceramic Technology enables these sensors to recover fully from condensation. This allows the sensor to maintain its accuracy over a longer period of time. Despite its accuracy, the Advanced Ceramic Technology sensor and related circuitry is economical.

Accuracy is maintained over the entire operating range, using a thermistor for temperature compensation.

Each A/RH-TEMP Series humidity transmitter is calibrated using an NIST Traceable Temperature and Humidity Chamber.

Any ACI thermistor, RTD, or temperature transmitter may be ordered with the A/RH transmitter. All A/RH-TT Room combination units will have a board mounted on the back of the enclosure. All A/RH-Temp Series transmitters have a limited five year warranty.


#### Product Specifications

<b>Supply Voltage</b>	250 Ohm Load: +15 to 36 VDC / 24 VAC 500 Ohm Load: +18 to 36 VDC / 24 VAC
<b>Power Consumption</b>	1 VA max.
<b>RH Measurement Range</b>	0 to 100% RH
<b>RH Output Signal</b>	2-wire, 4-20mA, 3-wire 0-5 or 0-10 VDC
<b>Temperature Sensor Output</b>	2-Wire Resistive, or 2-wire uA Output
<b>Temperature Transmitter Output</b>	2-wire, 4 to 20mA, or 3-wire, 1-5, 2-10 VDC
<b>Accuracy @ 77°F (25°C)</b>	+/- 1% over 20% Span between 20-95% RH +/- 2, 3, or 5% from 20 to 95% RH
<b>Repeatability</b>	0.5% RH
<b>Hysteresis</b>	Less than 0.4% RH
<b>Long Term Stability</b>	Less than 2% RH Drift / 5 Years
<b>Response Time</b>	110 seconds for 63% Step
<b>Saturated Response Time</b>	10 minutes for 63% Step
<b>Operating Temp. Range</b>	-10 to 122°F (-23.3 to 50°C)
<b>Operating RH Range</b>	0 to 100% RH

#### Wiring Diagrams available

C0000106 Rev 2.pdf

## RH-TEMP

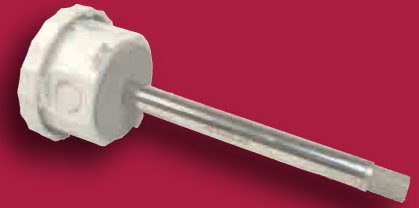

#### Attributes:

- Low Drift
- Highly Repeatabile
- Temperature Sensor Output
- Field Selectable Output Signals
- Single Point Field Calibration using DIP Switches
- Lowers Inventory Cost

#### Applications:

- Light Industrial
- Pharmaceutical
- Humidity Chambers
- Pool Environments
- Process Control



Made in the USA

DISPLAYS

TEMPERATURE

RELATIVE HUMIDITY

PRESSURE


CURRENT

AIR QUALITY


ACCESSORIES

# Dimensions


## Room

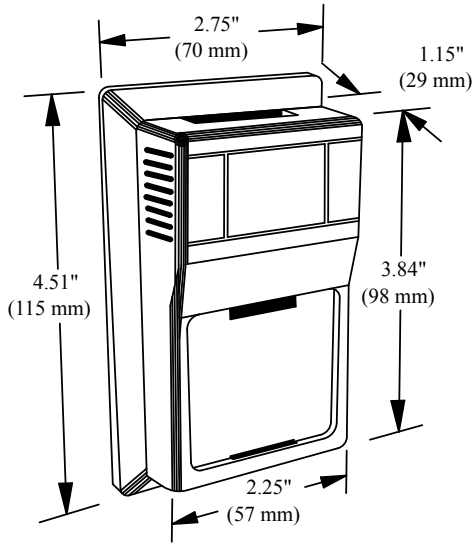


## Outside

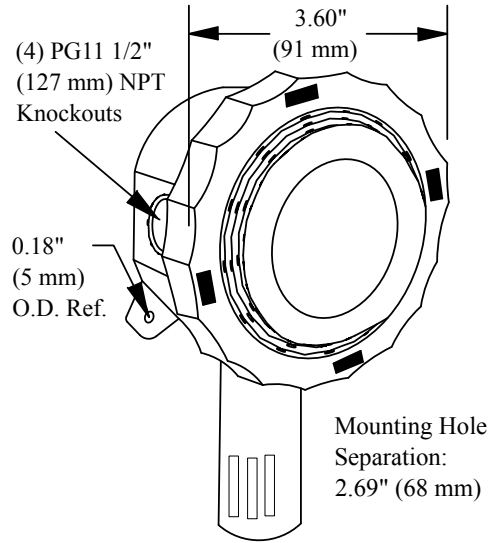

## Duct

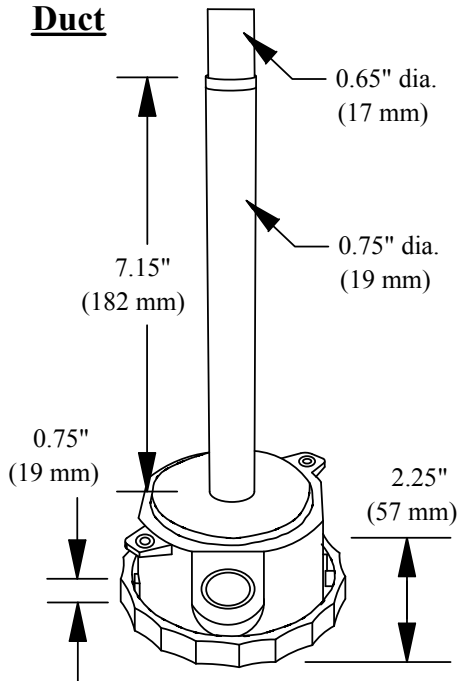

## Stainless Plate

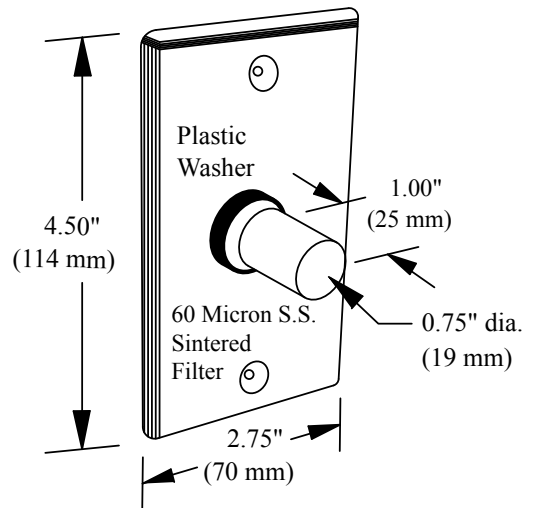

## Ordering Information

Accuracy A/ [ ]	Temp Sensor [ ]	Configuration [ ]	Temp Transmitter Output (if needed) [ ]
RH1 (+/- 1%)*	100 1K 1.8K	(R) Room	(4) 4 to 20mA Output
RH2 (+/- 2%)	2.2K ASI 3K	(RO) Room w/Override	(1) 1-5 VDC Output
RH3 (+/- 3%)	AN(Type III)	(RS) Room w/Set Point*	(2) 2-10VDC Output
RH5 (+/- 5%)	CP(Type II)	(RSO) Room w/Set Point &Override*	
	CSI 20K 100K	(D) Duct	
	1K Nickel	(O) Outdoor Air	
	TT1K** TT100**	(SP) Stainless Plate	

\*Specify a 20 % RH Range when ordering an A/RH1%  
 \*\*Specify a Temperature span for TT100 and TT1K Units

\* See Temperature Cut sheet for additional information on setpoint specs

*iProcessSmart.com*

Tel: 925-706-7433  
 Fax: 925-706-2583  
 sales@iprocessmart.com

DISPLAYS  
TEMPERATURE  
RELATIVE HUMIDITY  
PRESSURE  
CURRENT  
AIR QUALITY  
ACCESSORIES