



C SERIES DUAL PURPOSE POWDERED-ACTIVATED CARBON CARTRIDGES

- Economically priced**
- Provides sediment filtration and taste/odor/chlorine reduction**
- High dirt-holding capacity**
- Available in 4 sizes and two micron ratings**



C Series cartridges offer an economical solution for all of your general-purpose water filtration needs. Constructed of a carbon impregnated cellulose media, these dual-purpose cartridges filter out fine sediment particles and reduce unwanted taste, odor and chlorine from your tap water. A polyester reinforcement backing and external netting provide additional strength and dirt-loading capacity.

C Series cartridges are available in four different sizes and two (2) different micron ratings. Both the C-1 and C-2 are nominally rated at 5-microns, the C-8 is nominally rated at 1-micron.

These dual-purpose cartridges are well suited for a wide range of residential applications, and make excellent polishing filters when used in process or closed-loop streams.

C SERIES

Deluxe C-Series Powdered Carbon Cartridge

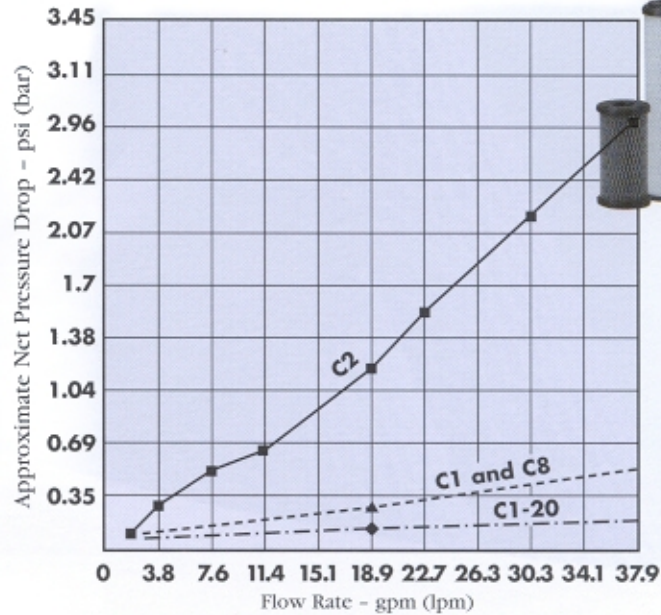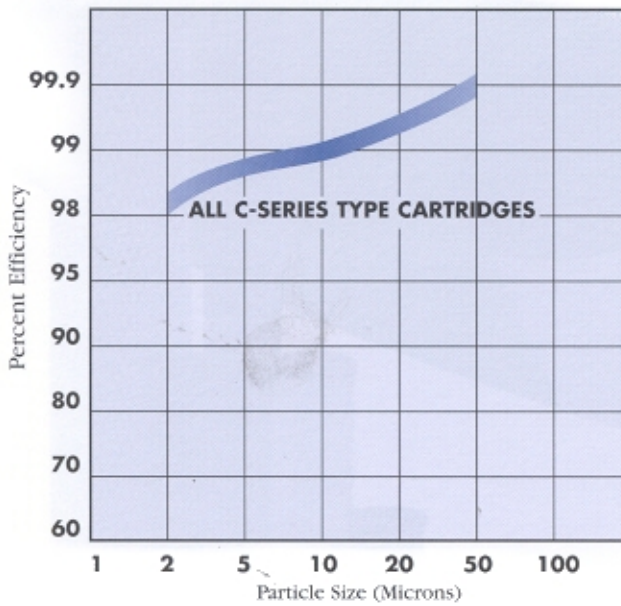

NSF
COMPONENT

This C1 is Tested and Certified by NSF International under ANSI/NSF Standard 42 for material requirements only.

Cartridge Specifications and Performance Data

Model	Maximum Dimensions	Micron Rating (Nominal)	Initial ΔP (psi) @ Flow Rate (gpm)	Chlorine Reduction @ Flow Rate (gpm)
C1	2-1/2" x 9-3/4" (64 mm x 248 mm)	5	3.75 psi @ 5 gpm (0.3 bar @ 18.9 lpm)	>5,000 gallons @ 1 gpm* (>18,900 liters @ 3.8 lpm)
C2	2-1/2" x 4-7/8" (64 mm x 124 mm)	5	5.0 psi @ 2 gpm (0.3 bar @ 7.6 lpm)	>2,500 gallons @ 0.5 gpm* (>9,500 liters @ 1.9 lpm)
C8	2-5/8" x 9-3/4" (248 mm x 67 mm)	1	4.0 psi @ 5 gpm (0.3 bar @ 18.9 lpm)	>7,500 gallons @ 1 gpm* (>28,400 liters @ 3.8 lpm)
C1-20	2-1/2" x 20" (64 mm x 508 mm)	5	1.0 psi @ 5 gpm (<1 bar @ 19 lpm)	>10,000 gallons @ 1 gpm* (>38,000 liters @ 3.8 lpm)
C1-20BB	4-1/2" x 20" (114 mm x 508 mm)	5	3.0 psi @ 5 gpm (0.2 bar @ 19 lpm)	>45,000 gallons @ 4 gpm* (>170,000 liters @ 15 lpm)

Materials of Construction

- **Filter Media** PAC Impregnated Cellulose
- **End Caps** Polypropylene (C8)
Vinyl Plastisol (C1 and C2)
- **Netting** Polyethylene
- **Core** Polypropylene
- **Reinforcement Backing** Polyester (C8)
Cellulose Polyester (C1 and C2)
- **Gasket** Buna-N (C8) (Optional EPR Gaskets)
- **Temperature Rating** 40°F to 145°F (C8) (4.4°C to 63°C)
40°F to 125°F (C1, C2, C1-20, C1-20BB)

WARNING: For drinking water applications, do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.
NOTE: Some harmless bacteria will attack cellulose media cartridges. If your cartridge seems to disintegrate, or has a musty or moldy odor, switch to a synthetic media cartridge or consult the manufacturer.

* **NOTE:** Estimated capacity tested at given flow rate using 2 ppm free available chlorine at continuous flow to 0.5 ppm breakthrough.

NOTE: Increased flow rates may result in less effective chlorine reduction.



iProcessSmart.com

14262 Doolittle Drive
San Leandro, CA 94577

Tel: 510-352-8199

Fax: 510-352-8897

E-Mail: sales@iprocessmart.com

