



CP SERIES PLEATED CELLULOSE POLYESTER CARTRIDGES

Special formulation of resin-impregnated cellulose and polyester fibers
Provides higher wet strength than regular cellulose cartridges
No unloading and minimal media migration

CP Series cartridges are manufactured from a special formulation of resin-impregnated cellulose and polyester fibers.



This unique blend of materials provides a higher wet strength than regular cellulose cartridges. It also provides high flow rates and dirt-holding capacity, while maintaining extremely low pressure drop.

The media is pleated around a polypropylene core for added strength and the ends are immersed in a thermo-setting vinyl plastisol. Embedding and sealing each end of the pleat block in this fashion fuses the components together forming a unitized end cap and gasket.

CP Series cartridges feature a color-coding system for easy identification of micron ratings: Black (1-micron), White (5-micron), Blue (10-micron).

CP SERIES

Pleated Cellulose Polyester Cartridges

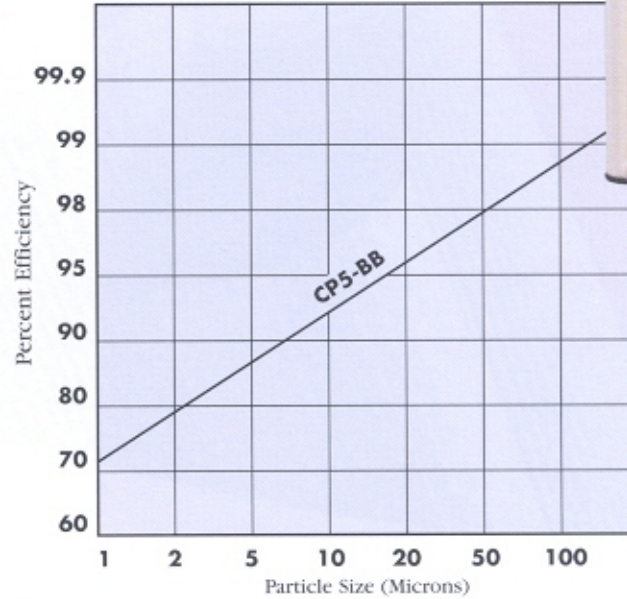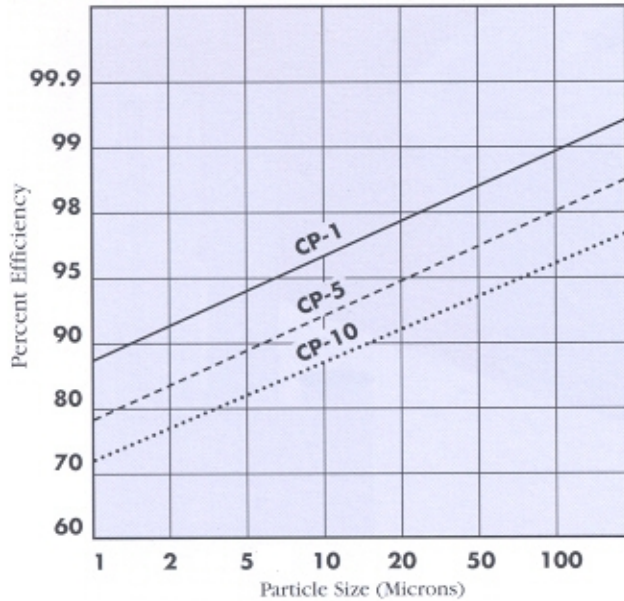

Cartridge Specifications and Performance Data

Model	Maximum Dimensions	Micron Rating (Nominal)	Initial ΔP (psi) @ Flow Rate (gpm)
CP-1	2-5/8" x 9-3/4" (67 mm x 249 mm)	1	<1 psi @ 10 gpm (<0.1 bar @ 38 lpm)
CP-5	2-5/8" x 9-3/4" (67 mm x 249 mm)	5	<1 psi @ 10 gpm (<0.1 bar @ 38 lpm)
CP-10	2-5/8" x 9-3/4" (67 mm x 249 mm)	10	<1 psi @ 10 gpm (<0.1 bar @ 38 lpm)
CP5-20	2-5/8" x 20" (67 mm x 508 mm)	5	<1 psi @ 10 gpm (<0.1 bar @ 38 lpm)
CP5-BB	4-1/2" x 9-3/4" (114 mm x 249 mm)	5	<1 psi @ 20 gpm (<0.1 bar @ 76 lpm)
CP5-20BB	4-1/2" x 20" (114 mm x 508 mm)	5	<1 psi @ 20 gpm (<0.1 bar @ 76 lpm)

Materials of Construction

- Media: Cellulose Polyester
- Core: Polypropylene
- End Caps: Vinyl Plastisol
- Maximum Temperature: 125°F (52°C)

WARNING: Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

USFilter
Plymouth Products

iProcessSmart.com

14262 Doolittle Drive
San Leandro, CA 94577

Tel: 510-352-8199

Fax: 510-352-8897

E-Mail: sales@iprocesssmart.com