

GS-601IRB

1/3" B/W Infrared Illuminator Bullet Camera


The B/W Infrared Illuminator Bullet Camera incorporates advanced 1/3" CCD sensor and high performance signal control circuitry.

It's **EIA** system incorporates the 1/3" sensor 250,000 pixels.

It's **CCIR** system incorporates the 1/3" sensor 290,000 pixels.

FEATURES:

- High quality picture, aesthetic and easy to install —
This is a good compliment for your line of CCTV systems.
- Auto Gain Control (AGC) —
This AGC function provides clear image in low light conditions.
- Auto Exposure (AE) —
Camera can adjust to any light source condition.
- Aperture Correction —
Adding Aperture Correction allows picture to be sharper.

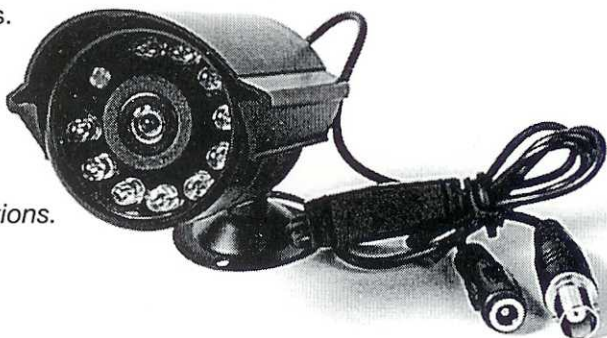


SPECIFICATIONS:

| | |
|-------------------------|---|
| IMAGE SENSOR | 1/3" CCD Image Sensor |
| HORIZONTAL RESOLUTION | More than 420 TV line |
| SCANNING SYSTEM | 2:1 Interlace |
| SENSITIVITY | 0 Lux F1.2 (LED On) / 0.1 Lux (LED Off) |
| SYNCHRONIZATION | Internal |
| S/N RATIO | More than 48dB |
| ELECTRONIC SHUTTER | Auto and up to 1/100,000 |
| VIDEO OUTPUT | 1 Vpp, 75 Ohm Composite |
| LENS | 3.6mm Board lens |
| POWER SUPPLY | DC 12V (+/- 10%) |
| POWER CONSUMPTION | 145mA +/- 10 under DC 12V (Max) |
| AUTO GAIN CONTROL | Full Auto |
| BACK LIGHT COMPENSATION | Full Auto |
| APERTURE CORRECTION | 1H Mode of H. aperture correction |
| DIMENSIONS | 46mm (Φ) x 72mm (L) |
| NET WEIGHT | 210g |
| STORAGE TEMPERATURE | -30 TO +60 Degree C |
| OPERATING TEMPERATURE | -10 TO +45 Degree C |

Specifications are subject to change without notice.

FUNCTION:

1. DC12V Power Supply
2. Video Signal Output Connector
3. Infrared LED
4. CCTV Lens

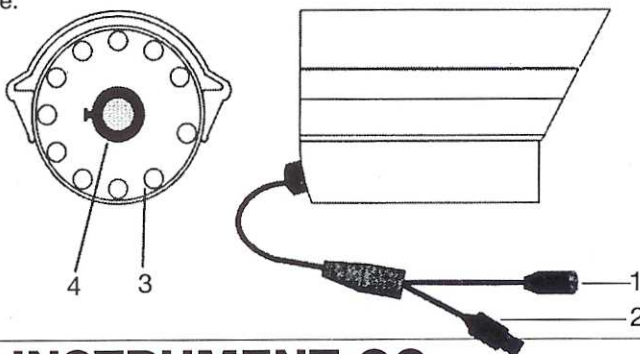

GOLDEN STATE INSTRUMENT CO.

14256 Doolittle Drive • San Leandro, CA 94577 • 1-800-227-2330 • Fax (510) 352-5988
Website: www.goldenstateinst.com • Email: gsi@goldenstateinst.com