


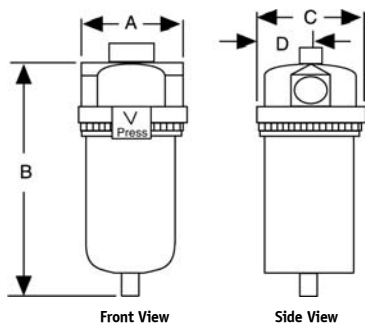

Physical Dimensions


Model #	Description	A	B	C
1P-060-M04-PHP	Metal Bowl, Manual Drain	3.125	10.25	3.125
1P-120-M06-PHP	Metal Bowl, Manual Drain	4.75	15.375	4.75
1P-175-M08-PHP	Metal Bowl, Manual Drain	4.75	15.375	4.75

Specifications

Port Sizes	1/2", 3/4", 1"
Thread Styles	NPT
Flow Capacity	60, 120, 175 SCFM @ 100 PSI
Bowl Type	Metal High Pressure Aluminum Housing
Maximum Temp. & Pressure*	200°F 500 PSI
Filter Capacity	3.0 Micron and Larger

Replacement Parts & Accessories

Description	Part Number
Bowl O-Ring	OR-143 (60)
	OR-235 (120, 175)
Replacement Element	1P-060
	1P-120
	1P-175

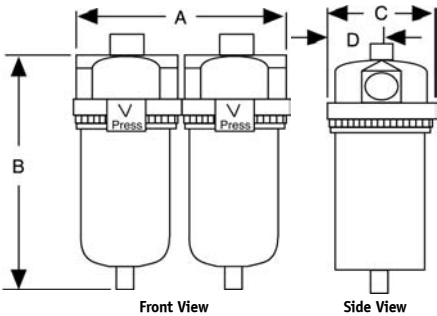

Physical Dimensions


Model #	Description	A	B	C
1P-060-M04-DCHP	Metal Bowl, Manual Drain	7.25	10.25	3.125
1P-090-M06-DCHP	Metal Bowl, Manual Drain	10.5	15.375	4.75
1P-150-M08-DCHP	Metal Bowl, Manual Drain	10.5	15.375	4.75

Specifications

Port Sizes	1/2", 3/4", 1"
Thread Styles	NPT
Flow Capacity	60, 90, 150 SCFM @ 100 PSI
Bowl Type	Metal High Pressure Aluminum Housing
Maximum Temp. & Pressure*	200°F 500 PSI
Filter Capacity	0.01 Micron and Larger

Replacement Parts & Accessories

Description	Part Number
Bowl O-Ring	OR-143 (60) OR-235 (90, 150)
Replacement Element: 1st Stage	1P-060 1P-090 1P-150
Replacement Element: 2nd Stage	3C-060 3C-090 3C-150

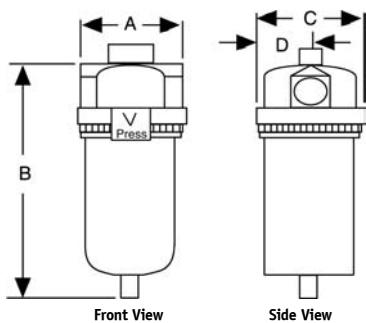

Physical Dimensions

Manual Drain Models:

Model #	Description	A	B	C
3P-060-M04-PHP	1/2" Port, Metal Bowl, Manual Drain	3.125	10.25	3.125
3P-090-M06-PHP	3/4" Port, Metal Bowl, Manual Drain	4.75	15.375	4.75
3P-150-M06-PHP	3/4" Port, Metal Bowl, Manual Drain	4.75	15.375	4.75
3P-150-M08-PHP	1" Port, Metal Bowl, Manual Drain	4.75	15.375	4.75

Auto Drain Models:


Model #	Description	A	B	C
3P-060-M04-FHP	1/2" Port, Metal Bowl, Float Drain	3.125	10.0	3.125
3P-090-M06-FHP	3/4" Port, Metal Bowl, Float Drain	4.75	15.375	4.75
3P-150-M06-FHP	3/4" Port, Metal Bowl, Float Drain	4.75	15.375	4.75
3P-150-M08-FHP	1" Port, Metal Bowl, Float Drain	4.75	15.375	4.75

Specifications

Port Sizes	1/2", 3/4", 1"
Thread Styles	NPT
Flow Capacity	60, 120, 175 SCFM @ 100 PSI
Bowl Type	Metal High Pressure Aluminum Housing
Maximum Temp. & Pressure*	200°F 500 PSI Manual 250 PSI Float
Filter Capacity	1.0 Micron and Larger

Replacement Parts & Accessories

Description	Part Number
Bowl O-Ring	OR-143 (60) OR-235 (090, 150)
Replacement Element	3P-060 3P-090 3P-150

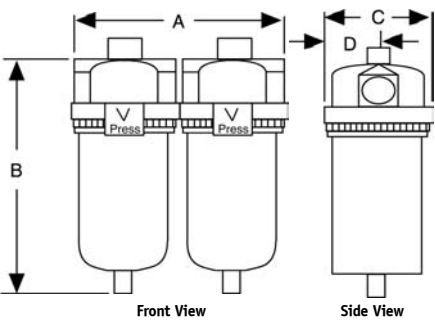

Physical Dimensions

Manual Drain Models:


Model #	Description	A	B	C
3P-060-M04-DCHP	1/2" Port, Metal Bowl, Manual Drain	7.25	10.25	3.125
3P-090-M06-DCHP	3/4" Port, Metal Bowl, Manual Drain	10.5	15.375	4.75
3P-150-M06-DCHP	3/4" Port, Metal Bowl, Manual Drain	10.5	15.375	4.75
3P-150-M08-DCHP	1" Port, Metal Bowl, Manual Drain	10.5	15.375	4.75

Specifications

Port Sizes	1/2", 3/4", 1"
Thread Styles	NPT
Flow Capacity	60, 90, 150 SCFM @ 100 PSI
Bowl Type	Metal High Pressure Aluminum Housing
Maximum Temp. & Pressure*	200°F 500 PSI
Filter Capacity	0.01 Micron and Larger

Replacement Parts & Accessories

Description	Part Number
Bowl O-Ring	OR-143 (60) OR-235 (90, 150)
Replacement Element: 1st Stage	3P-060 3P-090 3P-150
Replacement Element: 1st Stage	3C-060 3C-090 3C-150

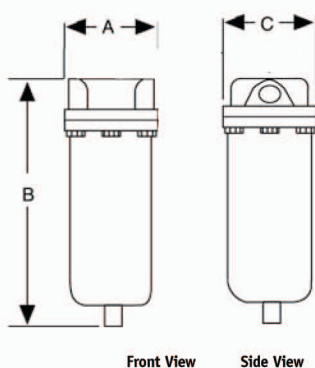

Physical Dimensions

Model #	Description	A	B	C
1M-300-M16-PHP	Metal Bowl, Manual Drain	6.0	33.0	5.7
1M-400-M16-PHP	Metal Bowl, Manual Drain	6.0	33.0	5.7
1M-700-M16-PHP	Metal Bowl, Manual Drain	6.0	33.0	5.7
1M-1200-M24 -PHP	Metal Bowl, Manual Drain	8.0	39.5	7.3

Specifications


Port Sizes	2", 3"
Thread Styles*	NPT
Flow Capacity	300, 400, 700 & 1200 SCFM @ 100 PSI
Bowl Types	Aluminum
Maximum Temp.	175°F
Maximum Pressure**	500 PSIG
Filter Capacity	3 Micron and Larger
Differential Pressure	< 2.5 PSID at Rated Flow

*3" unit available NPT thread only. **For higher pressure applications, consult factory. If unit is equipped with differential indicator or float drain, maximum temperature and pressure are 125°F and 150 PSIG regardless of bowl design.

Replacement Parts & Accessories

Description	Part Number
Bowl O-Ring (300/400/700)	N32-F35-OR
Manual Drain	KSG-071

Description	Part Number
Replacement Element	1M-300, 1M-400 1M-700, 1M-1200
Bowl O-Ring (1200)	PHC-032

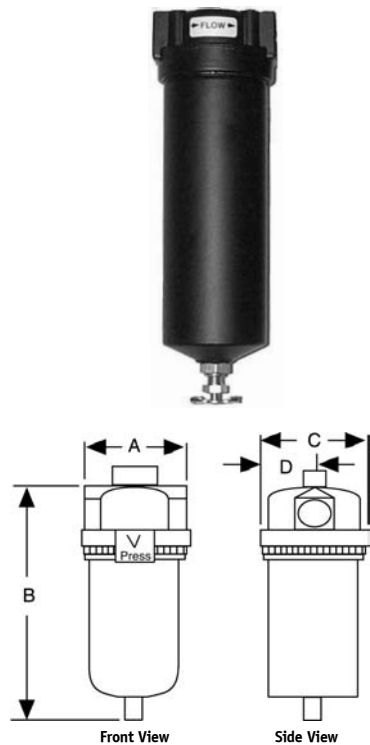

Physical Dimensions

Manual Drain Models:

Model #	Description	A	B	C
3C-060-M04-DCHP	1/2" Port, Metal Bowl, Manual Drain	7.25	10.25	3.125
3C-090-M06-DCHP	3/4" Port, Metal Bowl, Manual Drain	10.5	15.375	4.75
3C-150-M06-DCHP	3/4" Port, Metal Bowl, Manual Drain	10.5	15.375	4.75
3C-150-M08-DCHP	1" Port, Metal Bowl, Manual Drain	10.5	15.375	4.75

Specifications

Port Sizes	1/2", 3/4", 1"
Thread Styles	NPT
Flow Capacity	60, 90, 150 SCFM @ 100 PSI
Bowl Type	Metal High Pressure Aluminum Housing
Maximum Temp. & Pressure*	200°F 500 PSI
Filter Capacity	0.01 Micron and Larger

Replacement Parts & Accessories

Description	Part Number
Bowl O-Ring	OR-143 (60) OR-235 (90, 150)
Replacement Element:	3C-060 3C-090 3C-150