




ENK

- Plastic bodied
- DIN housing
- Galvanically isolated contacts
- UL, CSA approved
- Choice of many actuator styles
- Sealed to IP65

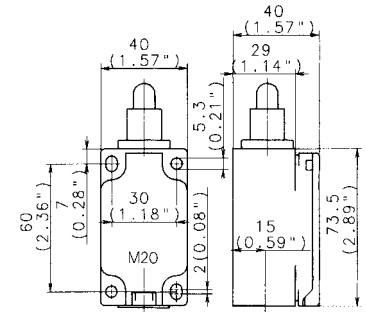

ENK RANGE

Part No.	608.1102.001	608.1152.007	608.1117.002	608.1167.008	608.1190.045
Model	ENK-U1Ziw	ENK-SU1Ziw	ENK-UIZRiw	ENK-SU1ZRiw	ENK-SU1FF
Dimensions					
Contact arrangement					
Rated isolation voltage	500Vac				
Permanent current	10A				
Contact action	Slow make & break	Snap action	Slow make & break	Snap action	Snap action
Galvanically isolated contacts	Yes				
Forced break	Yes	Yes	Yes	Yes	No
Max. switching frequency	100/min				
Mechanical life-No of switching cycles	10x10 ⁶				
Approvals	UL, CSA				
Operating temp	-30°C to +80°C				
Weight	0.15kg	0.15kg	0.16kg	0.16kg	0.15kg

ENK RANGE

Part No.	608.1135.003	608.1185.009	608.1136.012	608.1186.018
Model	ENK-U1ZAHS-V	ENK-SU1ZAHS-V	ENK-U1AV	ENK-SU1AV
Dimensions				
Contact arrangement				
Rated isolation voltage	500Vac			
Permanent current	10A			
Contact action	Slow make & break	Snap action	Slow make & break	Snap action
Galvanically isolated contacts	Yes			
Forced break	Yes	Yes	No	No
Max switching frequency	100/min			
Mechanical life	10x10 ⁶			
No of switching cycles	10x10 ⁶			
Approvals	UL, CSA			
Operating temperature	-30°C to +80°C			
Weight	0.23kg	0.23kg	0.24kg	0.24kg

ENK RANGE

Part No.	608.1137.011	608.1187.017	608.1171.096
Model	ENK-U1ZAD	ENK-SU1ZAD	ENK-SU1ZHw
Dimensions			
Contact arrangement			
Rated isolation voltage	500Vac		
Permanent current	10A		
Contact action	Slow make & break	Snap action	Snap action
Galvanically isolated contacts	Yes		
Forced break	Yes		
Max switching frequency	100/min		
Mechanical life	10x10 ⁶		
No of switching cycles	10x10 ⁶		
Approvals	UL, CSA		
Operating temp	-30°C to +80°C		
Weight	0.23kg		0.16kg