

Style 001

Performance

Standard Heater Specifications:


Standard Wattage
Tolerances +5%, - 10%

Wattage
at Standard Voltages

Part Number	Type	A	B	C	D	60V	120V	240V
001-10001	OPEN	6.875	8.25	.410	—	115	465	1850
001-10002	NOZZLE	7.875	9.25	.410	.065	115	465	*
001-10003	OPEN	7.75	9.125	.410	—	210	850	*
001-10004	NOZZLE	8.75	10.125	.410	.065	210	850	*
001-10005	OPEN	3.875	5.250	.410	—	240	*	*
001-10006	NOZZLE	4.875	6.250	.410	.065	240	*	*
001-10007	OPEN	3.875	5.250	.410	—	480	*	*
001-10008	NOZZLE	4.875	6.250	.410	.065	480	*	*
001-10009	OPEN	6.875	8.25	.594	—	290	1150	4650
001-10010	NOZZLE	7.875	9.25	.594	.115	290	1150	*

*not recommended

Standard outer casing: quartz.

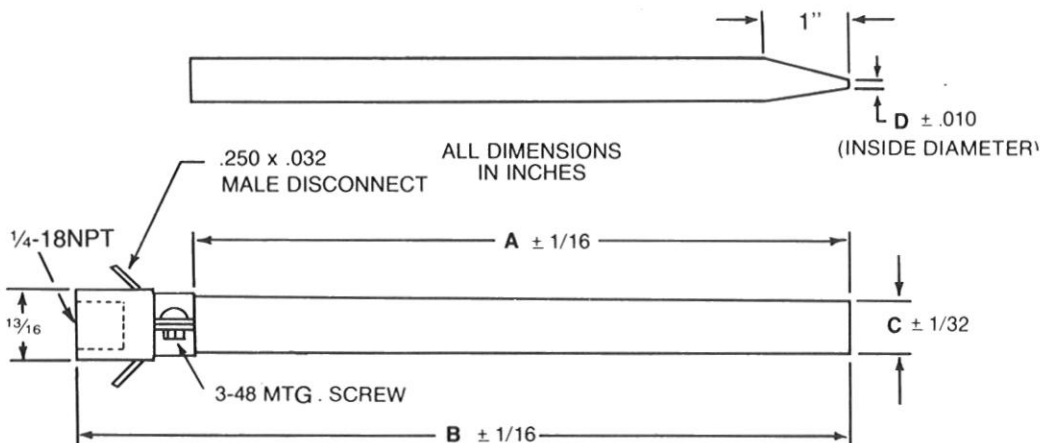


Performance Characteristics


Select the heater that matches your application

(See detailed curves in technical section of catalog)

Nozzled Air Heaters

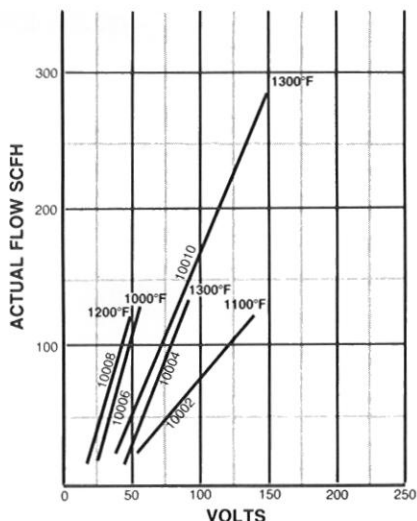

Open Air Heaters

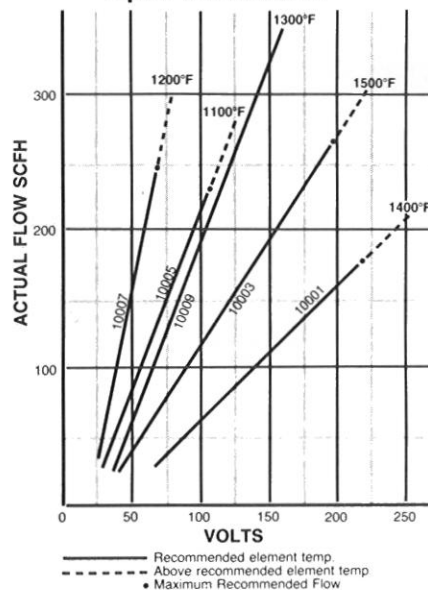

Contact CONVECTRONICS for your customized heating requirements

iProcessSmart.com

14262 Doolittle Drive, San Leandro, CA 94577

Tel: (510) 352-8199

Fax: (510) 352-8897

E-Mail: sales@iprocesssmart.com