


ORDERING INFORMATION FOR ETR-4300 SMARTER LOGIC® MICROPROCESSOR BASED TEMPERATURE CONTROLS

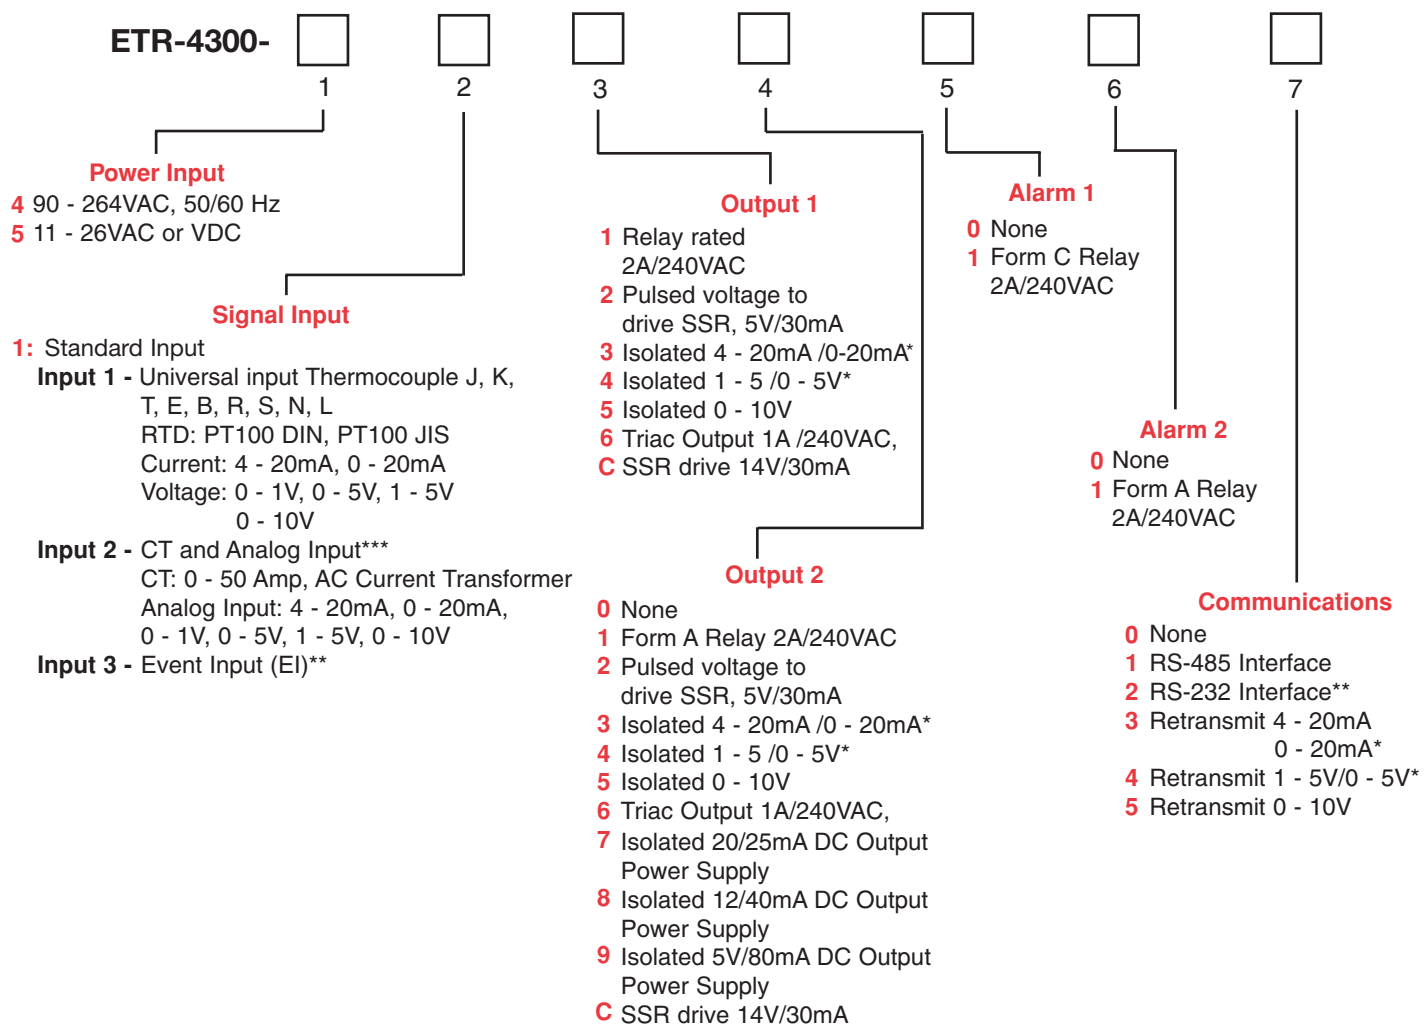

Example:

Standard Model

ETR-4300-4111111

- 90 - 264VAC Operating Voltage
- Input: Set 1 Universal Input
- Output 1: Relay
- Output 2: Relay
- Alarm 1: Form C Relay
- Alarm 2: Form A Relay
- RS-485 Communication Interface

- * Range set by front keyboard
- ** Alternative between RS-232 and Event Input
- *** Order CT94-1 if Heater Break Function is required.

ACCESSORIES

CC94-1
SNA10A

RS-232 Interface Cable (2M)
Smart Network Adapter for Third Party Software. Converts one channel of RS-485 or RS-422 to RS-232 Network

SNA10B

Smart Network Adapter for ETR-Net Software. Converts 255 channels of RS-485 or RS-422 to RS-232 Network