

### Physical Dimensions

Model #	Description	A	B	C	D
3P-020-M02-DCP	Metal Bowl, Manual Drain	7.0	6.8	3.0	1.5
3P-020-M02-DC	Metal Bowl, Float Drain	7.0	6.8	3.0	1.5
3P-020-M02-DCi	Metal Bowl, Float Drain w/Indicator	7.0	7.5	3.0	1.5
3P-020-P02-DCP	Poly Bowl, Manual Drain	7.0	6.8	3.0	1.5
3P-020-P02-DC	Poly Bowl, Float Drain	7.0	6.8	3.0	1.5
3P-020-P02-DCi	Poly Bowl, Float Drain w/Indicator	7.0	7.5	3.0	1.5

### Specifications

Port Sizes	1/4"
Thread Styles	NPT, BSPT, BSPP
Flow Capacity	20 SCFM @ 100 PSI
Bowl Types	Aluminum Polycarbonate
Maximum Temp. & Pressure*	Aluminum 175°F, 200 PSIG Polycarb. 125°F, 150 PSIG
Filter Capacity	0.01 Micron and Larger
Differential Pressure	< 5.0 PSID at Rated Flow


\*For higher pressure applications, consult factory. If unit is equipped with differential indicator, maximum temperature and pressure are 125°F and 150 PSIG regardless of bowl design.

### Order Guide

	Port Size	Metal Bowl	Metal Bowl w/Indicator	Poly Bowl	Poly Bowl w/Indicator
Manual Drain	1/4"	3P-020-M02-DCP	3P-020-M02-DCPi	3P-020-P02-DCP	3P-020-P02-DCPi
Float Drain	1/4"	3P-020-M02-DC	3P-020-M02-DCi	3P-020-P02-DC	3P-020-P02-DCi

### Replacement Parts & Accessories

Description	Part Number	Description	Part Number
Bowl O-Ring	N32-95-009	Stage 1 Element	3P-020
Metal Bowl Assembly, Plastic Float Drain	N32-95-950	Blanking Cap	N32-95-020
Differential Indicator	N32-W1-DPi	Stage 2 Element	3C-020
Manual Drain	N32-95-182	Manual Flex Drain	N32-95-610
Brass Float Drain	N32-95-978	Low Flow Plastic Drain	N32-96-400
Plastic Float Drain	N32-95-973	Poly Bowl, Plastic Float Drain	N32-15-160

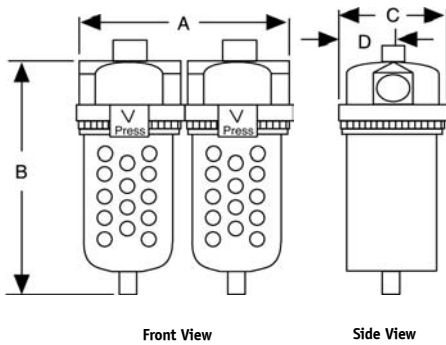

### Physical Dimensions

Model #	Description	A	B	C	D
3P-060-M04-DCP	Metal Bowl, Manual Drain	8.0	10.0	3.8	2.0
3P-060-M04-DC	Metal Bowl, Float Drain	8.0	10.5	3.8	2.0
3P-060-M04-DCi	Metal Bowl, Float Drain w/Indicator	8.0	11.5	3.8	2.0
3P-060-P04-DCP	Poly Bowl, Manual Drain	8.0	11.0	3.8	2.0
3P-060-P04-DC	Poly Bowl, Float Drain	8.0	10.5	3.8	2.0
3P-060-P04-DCi	Poly Bowl, Float Drain w/Indicator	8.0	11.5	3.8	2.0

### Specifications

Port Sizes	1/4", 3/8", 1/2"
Thread Styles	NPT, BSPT, BSPP
Flow Capacity	60 SCFM @ 100 PSI
Bowl Types	Aluminum Polycarbonate
Maximum Temp. & Pressure*	Aluminum 175°F, 200 PSIG Polycarb. 125°F, 150 PSIG
Filter Capacity	0.01 Micron and Larger
Differential Pressure	< 5.0 PSID at Rated Flow


\*For higher pressure applications, consult factory. If unit is equipped with differential indicator, maximum temperature and pressure are 125°F and 150 PSIG regardless of bowl design.

### Order Guide

	Port Size	Metal Bowl	Metal Bowl w/Indicator	Poly Bowl	Poly Bowl w/Indicator
Manual Drain	1/4"	3P-060-M02-DCP	3P-060-M02-DCPi	3P-060-P02-DCP	3P-060-P02-DCPi
	3/8"	3P-060-M03-DCP	3P-060-M03-DCPi	3P-060-P03-DCP	3P-060-P03-DCPi
	1/2"	3P-060-M04-DCP	3P-060-M04-DCPi	3P-060-P04-DCP	3P-060-P04-DCPi
Float Drain	1/4"	3P-060-M02-DC	3P-060-M02-DCi	3P-060-P02-DC	3P-060-P02-DCi
	3/8"	3P-060-M03-DC	3P-060-M03-DCi	3P-060-P03-DC	3P-060-P03-DCi
	1/2"	3P-060-M04-DC	3P-060-M04-DCi	3P-060-P04-DC	3P-060-P04-DCi

### Replacement Parts & Accessories

Description	Part Number	Description	Part Number
Bowl O-Ring	N32-95-257	Blanking Cap	N32-95-020
Metal Bowl Assembly, Brass Float Drain	N34-95-200	Manual Drain (for Metal Bowl)	PC-02
Differential Indicator	N32-W1-DPi	2nd Stage Element	3C-060
Manual Drain (for Poly Bowl)	N32-95-182	Poly Bowl, Flex Drain	N32-95-610
Brass Float Drain	N32-95-978	Poly Bowl, Brass Float Drain	N32-15-164
Plastic Float Drain	N32-95-973	Poly Bowl, Plastic Float Drain	N32-15-165
1st Stage Element	3P-060		

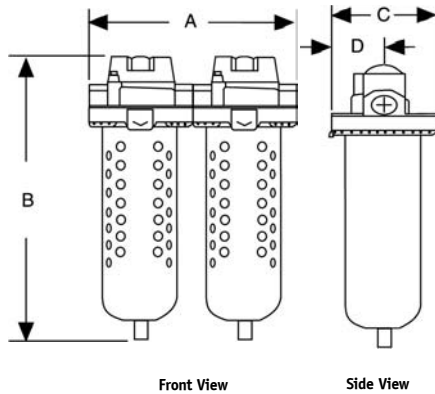

### Physical Dimensions

Model #	Description	A	B	C	D
3P-090-M06-DCP	Metal Bowl, Manual Drain	10.0	18.25	4.6	2.4
3P-090-M06-DC	Metal Bowl, Float Drain	10.0	17.5	4.6	2.4
3P-090-M06-DCi	Metal Bowl, Float Drain w/Indicator	10.0	19.0	4.6	2.4
3P-090-P06-DCP	Poly Bowl, Manual Drain	10.0	15.0	4.6	2.4
3P-090-P06-DC	Poly Bowl, Float Drain	10.0	14.5	4.6	2.4
3P-090-P06-DCi	Poly Bowl, Float Drain w/Indicator	10.0	15.0	4.6	2.4

Physical dimensions for the 90 SCFM units are identical to the 150 SCFM units.

### Specifications

Port Sizes	1/2", 3/4", 1"
Thread Styles	NPT, BSPT, BSPP
Flow Capacity	90 & 150 SCFM @ 100 PSI
Bowl Types	Aluminum Polycarbonate
Maximum Temp. & Pressure*	Aluminum 175°F, 200 PSIG Polycarb. 125°F, 150 PSIG
Filter Capacity	0.01 Micron and Larger
Differential Pressure	< 5.0 PSID at Rated Flow

\*For higher pressure applications, consult factory. If unit is equipped with differential indicator, maximum temperature and pressure are 125°F and 150 PSIG regardless of bowl design.

### Order Guide

	Port Size	Metal Bowl	Metal Bowl w/Indicator	Poly Bowl	Poly Bowl w/Indicator
Manual Drain	1/2"	3P-090-M04-DCP	3P-090-M04-DCPi	3P-090-P04-DCP	3P-090-P04-DCPi
	3/4"	3P-090-M06-DCP	3P-090-M06-DCPi	3P-090-P06-DCP	3P-090-P06-DCPi
	1"	3P-090-M08-DCP	3P-090-M08-DCPi	3P-090-P08-DCP	3P-090-P08-DCPi
Float Drain	1/2"	3P-090-M04-DC	3P-090-M04-DCi	3P-090-P04-DC	3P-090-P04-DCi
	3/4"	3P-090-M06-DC	3P-090-M06-DCi	3P-090-P06-DC	3P-090-P06-DCi
	1"	3P-090-M08-DC	3P-090-M08-DCi	3P-090-P08-DC	3P-090-P08-DCi
Manual Drain	1/2"	3P-150-M04-DCP	3P-150-M04-DCPi	3P-150-P04-DCP	3P-150-P04-DCPi
	3/4"	3P-150-M06-DCP	3P-150-M06-DCPi	3P-150-P06-DCP	3P-150-P06-DCPi
	1"	3P-150-M08-DCP	3P-150-M08-DCPi	3P-150-P08-DCP	3P-150-P08-DCPi
Float Drain	1/2"	3P-150-M04-DC	3P-150-M04-DCi	3P-150-P04-DC	3P-150-P04-DCi
	3/4"	3P-150-M06-DC	3P-150-M06-DCi	3P-150-P06-DC	3P-150-P06-DCi
	1"	3P-150-M08-DC	3P-150-M08-DCi	3P-150-P08-DC	3P-150-P08-DCi

### Replacement Parts & Accessories

Description	Part Number	Description	Part Number
Metal Bowl Assembly, Brass Float Drain	N34-15-179	2nd Stage Element	3C-090, 3C-150
Differential Indicator	N32-W1-DPi	Blanking Cap	N32-95-020
Manual Drain (for Poly Bowl)	N32-95-182	Manual Drain (for Metal Bowl)	PC-03
Brass Float Drain	N32-95-978	Bowl O-Ring	N32-95-256
Plastic Float Drain	N32-95-973	1st Stage Element	3P-090, 3P-150
Poly Bowl, Brass Float Drain	N32-15-166		